

Pure Sinewave Inverter 350VA

RoHS Compliant
Directive 2002/95/EC



Benefits

- Quiet Operation
- Power for sensitive electronics, without interference
- Pure Sinewave Output
- Multiple electronic protection functions
- Light weight and compact size
- Rugged & Reliable
- Years of safe and trouble free operation

Applications

- Telecom Power Plants
- Marine & other rugged environments
- Electric Utilities and Substations
- Base Station Power
- Industrial Controls
- Solar Home Systems
- Fuel Cell Applications
- Solar / Alternative Power Systems
- Emergency Power Backup (UPS)
- Pleasure and holidays
- Development aid

Sinewave Inverter

Series SWING pro 350VA

Description

The model 350VA pure sinewave inverter supplies a 230VAC output voltage either from a 12V, 24V or 48VDC power source. The shape of the output voltage is pure sinewave - as from the grid.

All new High Frequency Switching Design offers high power and reliability in a compact package and light weight. Extra input and output filtering reduce EMI to extremely low levels.

Reliability features include short circuit protection, overvoltage protection, low input voltage protection, over-temperature protection.

The input and output is fully isolated. The superb overload capability supplies short time peak power to start heavy equipment such as pumps and compressors.


Features

- Fully Isolated Design
- Microprocessor controlled
- Frequency selectable 50 or 60Hz
- Outstanding efficiency at full load
- Crystal controlled output frequency
- Pure and fast regulated sinewave output
- LED-indicator for operating status and alarm
- Over-temperature protection
- Short circuit protection
- Low input voltage protection
- Cycle by cycle current limiting
- Softstart
- Load and temperature controlled fan
- 24 month parts and labour warranty

Options

- Remote Control
- 115VAC output voltage

Block Diagram

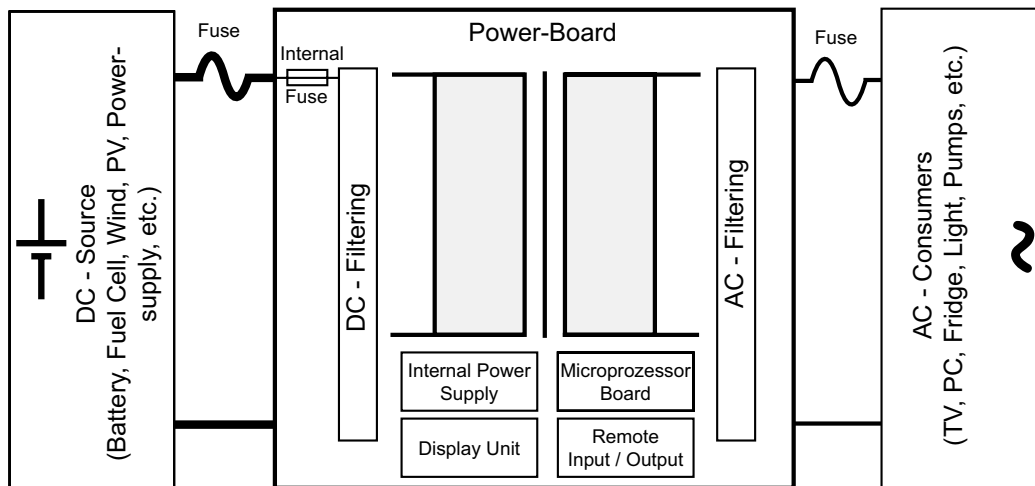

Specifications (Specifications Subject to Change Without Notice)

Electrical (output)

Nominal (VAC)	230 +/- 3%
Frequency (Hz)	50 / 60 +/- 0.05% (selectable)
Nominal power (VA)	350
Max. Power for 3 min. (VA)	400
Peak Power (VA)	700
Output Waveform	Pure Sinewave < THD 3%
Protection circuitry	Short circuit, Overload, Overtemperature
Indicators	Overload, Overtemperature
Power Factor	0.4 - 1 (COS Phi)

Environmental Specifications

Operating Temp. Range	-30° to +70°C @ Pmax Derating Linearly 4% per °C from 50°C
Humidity	0 - 95% Relative Humidity (non-condensing)
Audible Noise	NONE, 0db @ 1m (Fan OFF)
Fan	Load and temperature controlled
Isolation	Input-Output 1100VDC, Input-Case 1100VDC, Output-Case 500VDC

Electrical (input)

Nominal voltage (VDC)	12	24	48
Voltage range (VDC)	10 - 16	20 - 32	42 - 62
Amps @ Pnom (A)	32	15.5	7.8
Protection circuitry	Overvoltage, Lowvoltage		
Idle current 230V ON (A)	0.4	0.3	0.2
Efficiency max.	94%	95%	95%
Efficiency @full load	92%	93%	93%
Indicators	Overvoltage, Lowvoltage		

Mechanical Specifications

Length	23.0 cm
Width	11.9 cm
Height	7.1 cm
Clearance	2.5 cm all around
Material	Aluminium
Finish	Black Anodize / Powder Epoxy Coat
Weight	1.4 Kg
Connections	DC-clamps, IEC AC-connector (Connector supplied with inverter)
Warranty	2 years
Standards	Approval to CE

Available from:



RIPEnergy®

The power conversion company

RIPEnergy AG
Talstrasse 2
CH-8702 Zollikon
Switzerland

Ph +41-(0)43-818 53 85
Fax +41-(0)43-818 53 87
www.ripenergy.ch