

LED STREET LIGHT

RT750SL-T SERIES - - - - -



Feature

60-70 % energy saving compared to traditional light and save money.

Life span > 50,000.00 Hours,
IP65 industrial standards.

Good color rendering $RA > 80$,
multi-color choice :2700-7000K.

Easy installation & free Maintenance.

Environmentally friendly.


Application

City streets, Pavements, Squares, Schools,
Parks, Yards, Residential areas,
Factories and Others.


Pole's Height:6-12m

Road Width:8-24m

Polar Candela Distribution

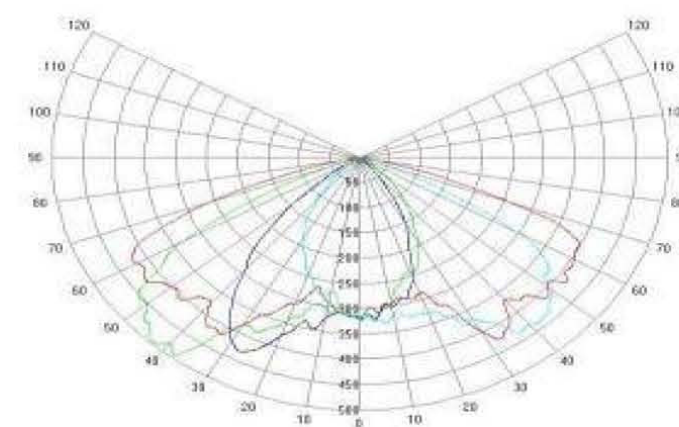

Dimensional




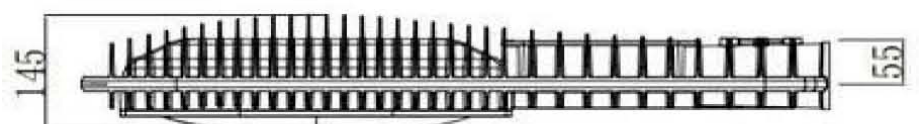


Techinc specification

Model No	LED Power	Voltage	PF	LED Lumen	Total Lumen
RT750SL-T60W	60W	AC (85V-265V) / (50-60Hz)	>0.9	90-100lm/W	6000lm
RT750SL-T80W	80W	AC (85V-265V) / (50-60Hz)	>0.9	90-100lm/W	8000lm
RT750SL-T100W	100W	AC (85V-265V) / (50-60Hz)	>0.9	90-100lm/W	10000lm
RT750SL-T125W	125W	AC (85V-265V) / (50-60Hz)	>0.9	90-100lm/W	12500lm

Model No	Light efficiency	Beam Angle	Ra	CCT	Life time	Weight
RT750SL-T60W	85%	65°	Ra>80	2700K-7000K	>50000Hrs	12Kg
RT750SL-T80W	85%	65°	Ra>80	2700K-7000K	>50000Hrs	12Kg
RT750SL-T100W	85%	65°	Ra>80	2700K-7000K	>50000Hrs	12Kg
RT750SL-T125W	85%	65°	Ra>80	2700K-7000K	>50000Hrs	12Kg

■ Illumination Data

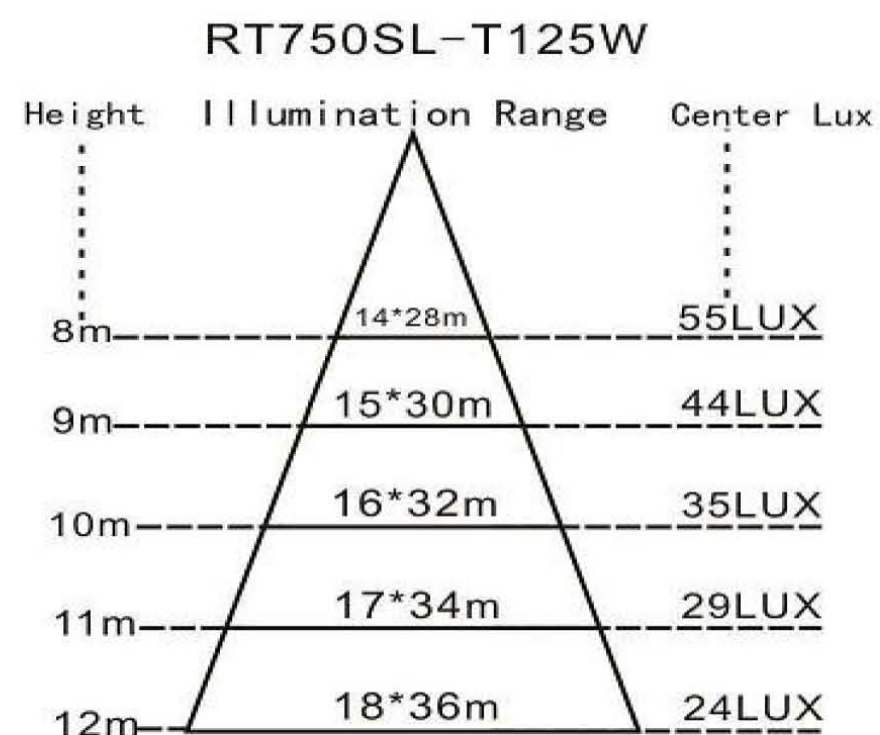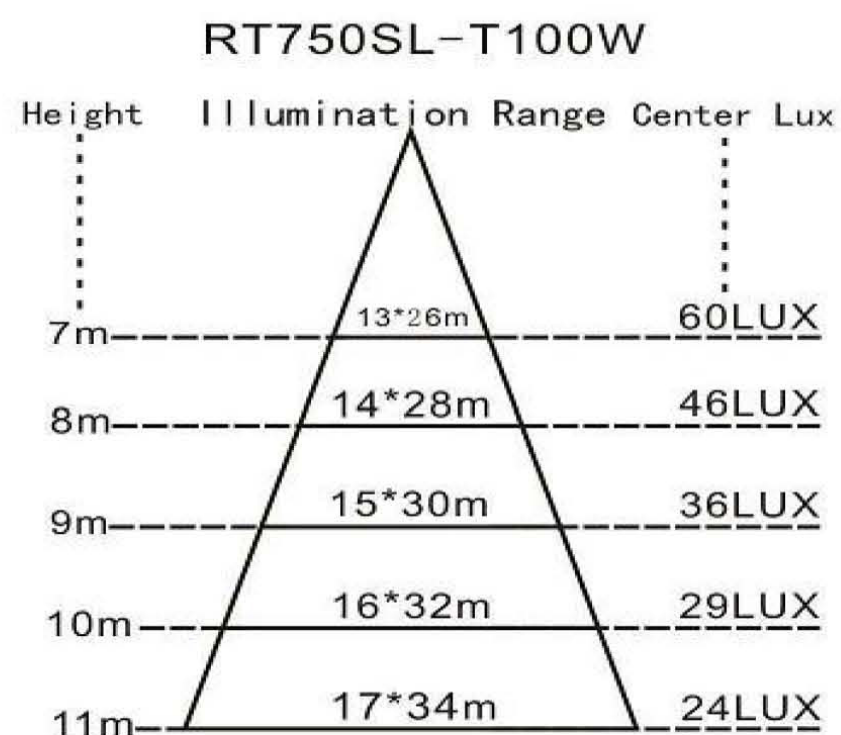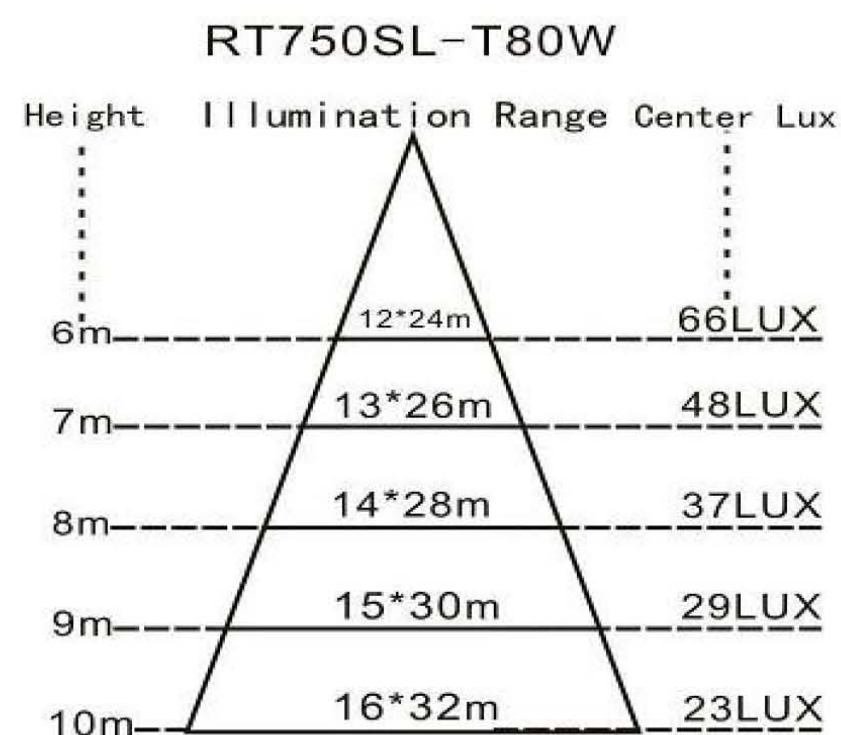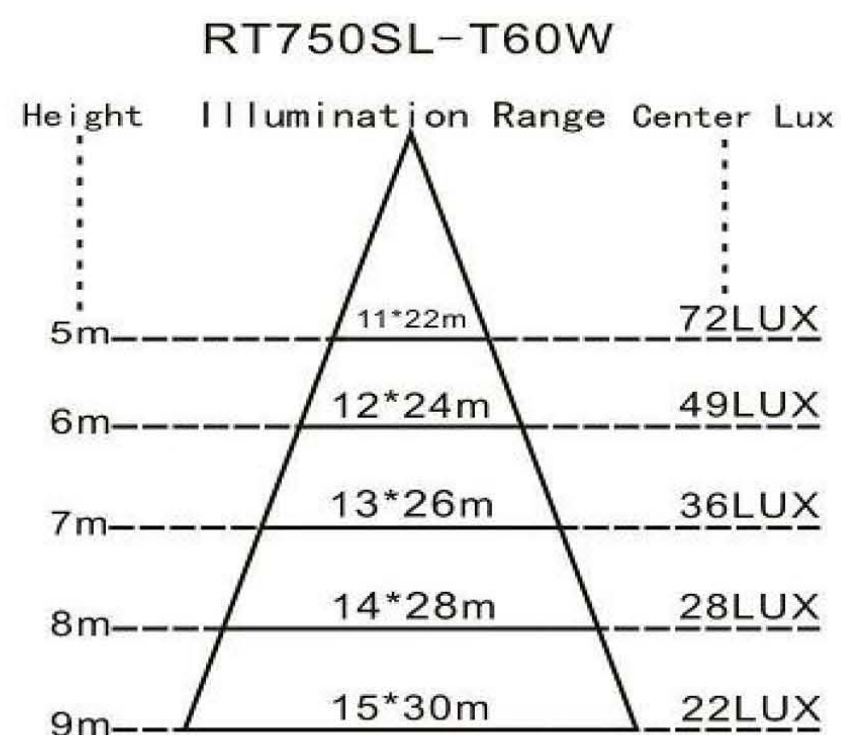

Note: These illumination data for reference exactly data will according application.

■ Project Picture

